


normann copenhagen

Inspired by Copenhagen's iconic street lighting

A granite base with a thunder grey mineral mélange constitutes the magnetic starting point for the Grant series. In a symphony of contrasts, this elegant igneous stone is paired with polished metals to compose a refined and balanced design. Grant arises from the aesthetic interplay between high shine and dusty granular depth.

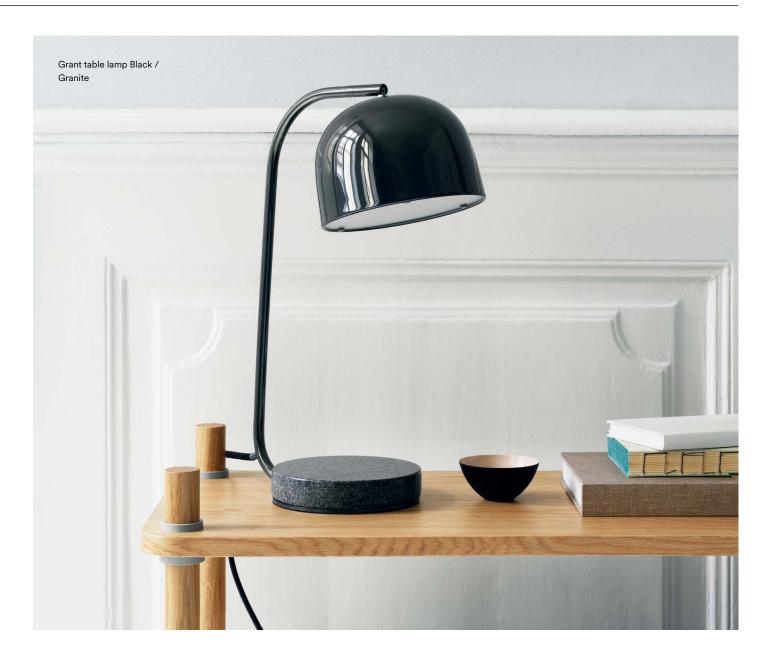

normann

Collection Overview



Grant pendant Ø23 cm H: 17 x Ø: 23 cm Shown in Black / Granite



Grant pendant Ø45 cm H: 29 x Ø: 45 cm Shown in Black / Granite



Grant floor lamp H: 136 x L: 31 cm Shown in Black / Granite




Grant table lamp H: 45 x L: 26 cm Shown in Black / Granite



Grant wall lamp 43 cm H: 22 x L: 43 cm Shown in Black / Granite



Grant wall lamp 111 cm H: 32 x L: 111 cm Shown in Black / Granite

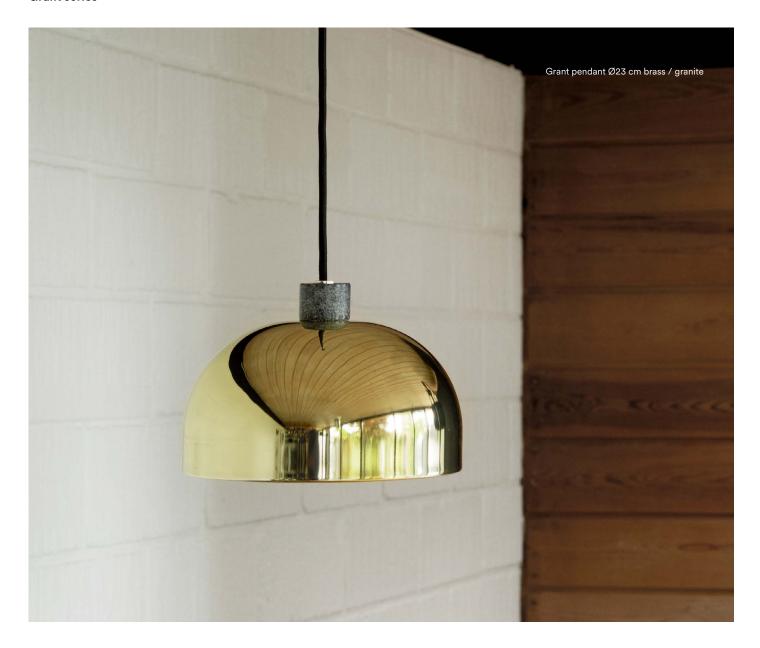

Product Facts Grant pendant EU

Description

The Grant pendant lamps in two sizes provide ample opportunity for lighting up spaces of various sizes and characters. Due to the dispersion lens, the pendants can be hung high without blinding.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection are constructed with a replaceable low-energy LED light source with dispersion lens, attached with small brass finger screws.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

4 m textile cord, black color.

Canopy

Included, black color, H: 7,7 x Ø: 9 cm, 0,04 kg

Dimmable function

Yes - with dimmable light source. Ensure your dimmer is compatible with LED.

Voltage

220-240 V 🍽

normann

▶ Frequency

50/60 Hz

Ip rating

IP20

Classification

Class II

Socket

GX53

Max load

7 W

Light source - included

Grant Pendant Ø23 cm:

LED included: GX53 Art. No.: 502028

Power: 5W±10% CCT: 3 000 K Output: 400 lm ±10% Life Span: 15 000-20 000

CRI: ~80

Grant Pendant Ø45 cm:


LED included: GX53 Art. No.: 502029

Power: 7W±10% CCT: 3 000 K Output: 610 lm ±10% Life Span: 15 000-20 000

CRI: ~ 80


General standards & certificates

EN 55015:2013 EN 55015:2013+A1:2015 EN 61547:2009 EN 61000-3-2:2014 EN 61000-3-3:2013

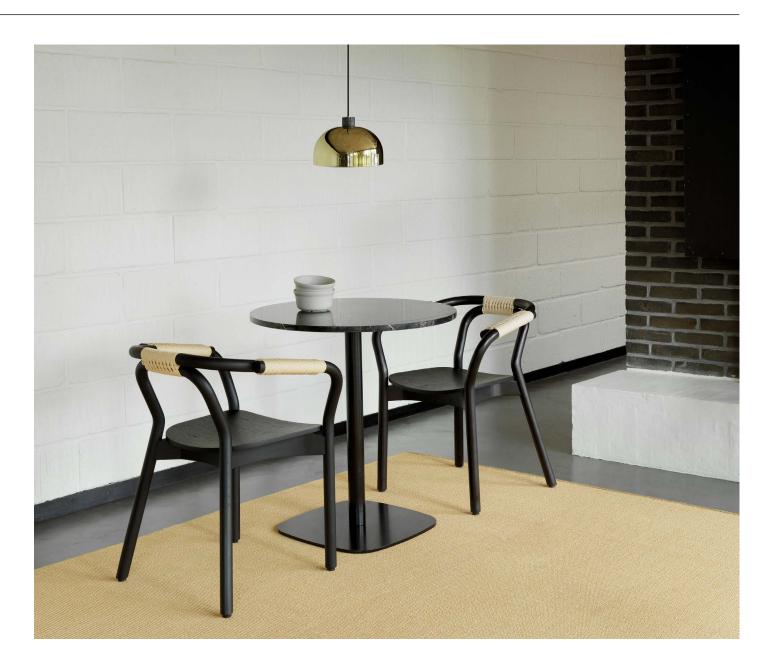


normann

Grant pendant Ø23

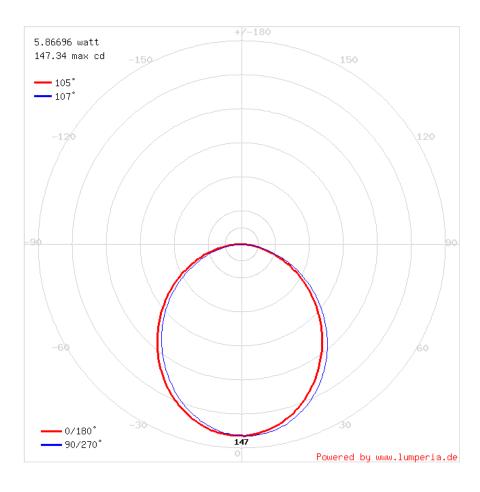

Grant pendant Ø45

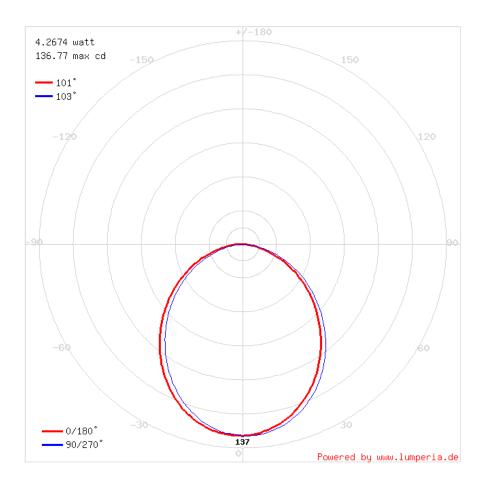



Product Facts Grant floor lamp EU

Description

Sharing the same features as the Grant table lamp, an adjustable shade and dimmer switch, the Grant floor lamp is ideal as a reading lamp or for lighting up dark corners.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection are constructed with a replaceable low-energy LED light source with dispersion lens,attached with small brass finger screws. A ball joint connection on the table and floor lamp allows the lampshades to be positioned in diverse directions.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

2 m textile cord with switch, black color. ▶

Yes

Voltage

220-240 V

Frequency

50/60 Hz

Ip rating

IP20

Classification

Class II

Socket

GX53

Max load

7 W

Light source - included

LED included: GX53 Art. No.: 502027

Power: 4W±10% CCT: 3 000 K Output: 300 lm ±10%

Life Span: 15 000-20 000

CRI: ~80

General standards & certificates


EN 55015:2013

EN 55015:2013+A1:2015

EN 61547:2009 EN 61000-3-2:2014 EN 61000-3-3:2013



normann

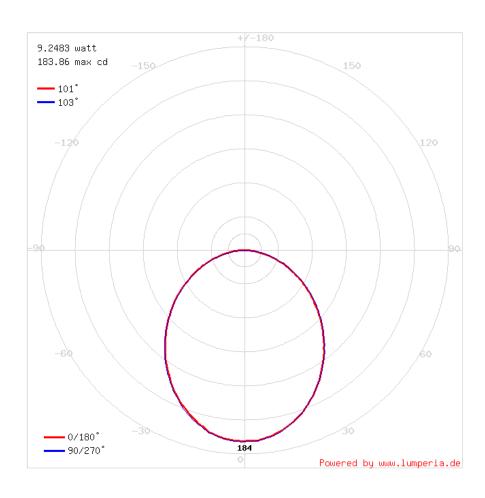



Product Facts Grant table lamp EU

Description

The Grant table lamp is a sophisticated desk lamp for the home office, but equally fit for the bedside table or living room sideboard. Tilt the lampshade up and down to direct the light and scroll on the cord's dimmer switch to go from soft ambiance light to a bright reading light.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection, are constructed with a replaceable low-energy LED light source with dispersion lens, attached with small brass finger screws. A ball joint connection on the table and floor lamp allows the lampshades to be positioned in diverse directions.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

2 m textile cord with switch, black color.

Yes

Voltage

220-240 V

Frequency

50/60 Hz

Ip rating

IP20

Classification

Class II

Socket

GX53

Max load

7 W

Light source - included

LED included: GX53 Art. No.: 502028

Power: 5W±10% CCT: 3 000 K Output: 400 lm ±10% Life Span: 15 000-20 000

CRI: ~ 80


General standard & certificates

EN 55015:2013


EN 55015:2013+A1:2015

EN 61547:2009 EN 61000-3-2:2014



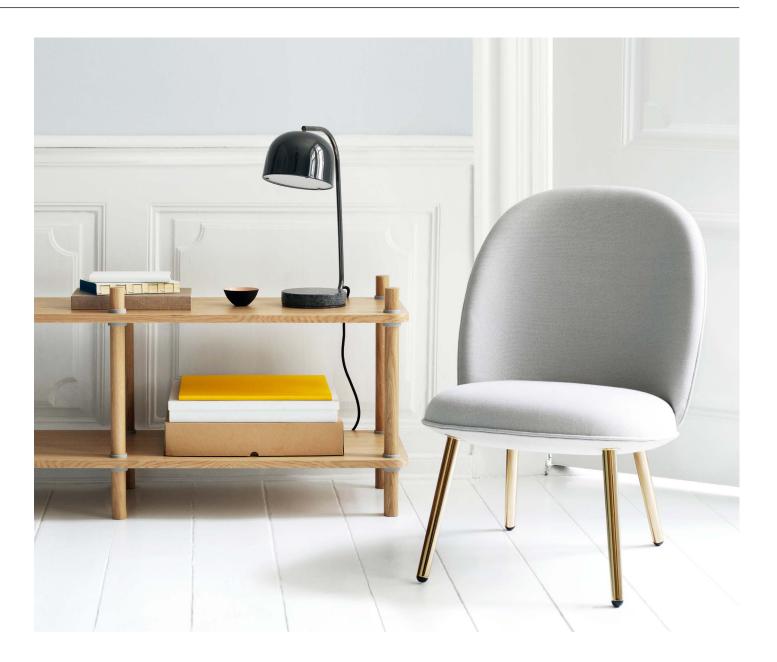

normann

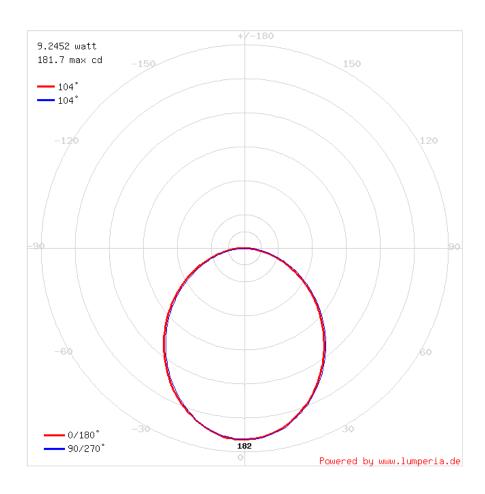



Product Facts Grant wall lamp EU

Description

An aesthetic and space-optimizing lighting solution, the Grant wall lamps have arms that move from right to left and lampshades that can be tipped up and down, allowing the lamps to take up several different positions.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection are constructed with a replaceable low-energy LED light source with dispersion lens, attached with small brass finger screws. The wall lamp versions can move from side to side (ca.180 degrees). A ball joint connection allows the lampshades to be positioned in diverse directions.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

4 m textile cord with switch, black color.

Yes

Voltage

220-240 V

Frequency

50/60 Hz

Ip rating

IP20

Classification

Class II

Socket

GX53

Max load

7 W

Light source - included

LED included: GX53 Art. No.: 502027

Power: 4W±10% CCT: 3000 K

Output: 300 lm ±10% Life Span: 15 000-20 000

CRI: ~80

General standards & certificates


EN 55015:2013

EN 55015:2013+A1:2015

EN 61547:2009


EN 61000-3-2:2014

EN 61000-3-3:2013

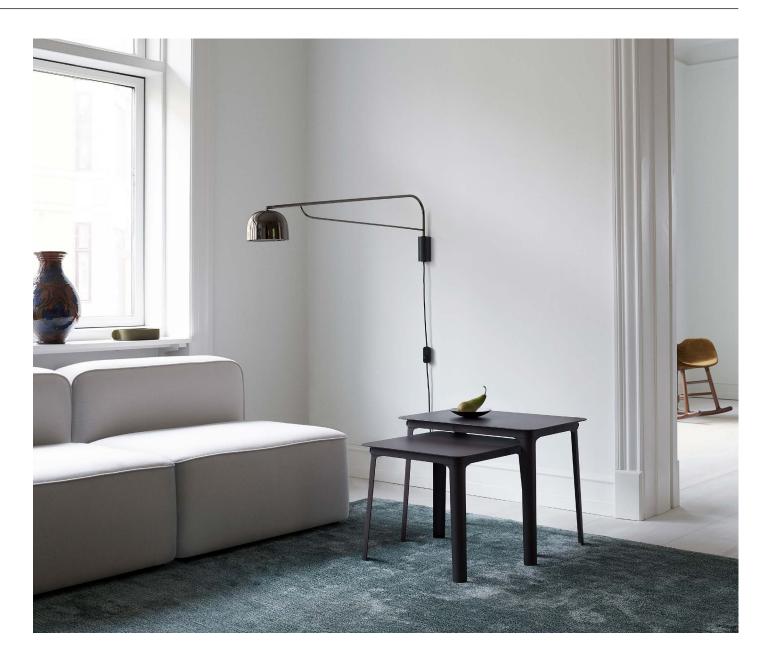


normann


Grant wall lamp 43 cm

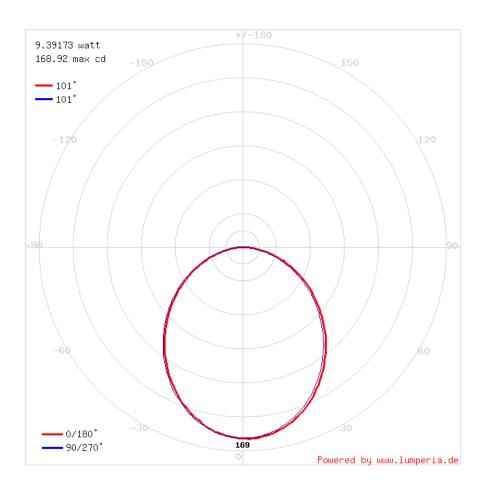


Grant wall lamp 111 cm

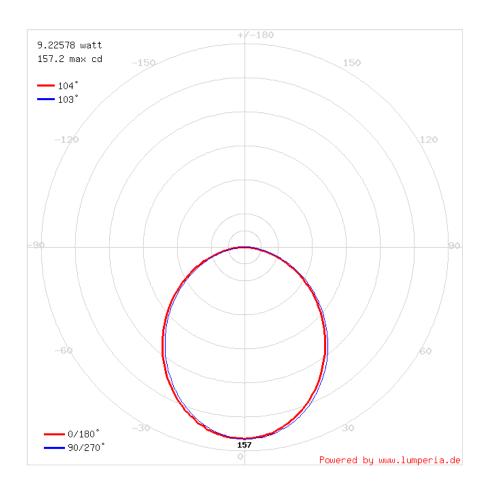


Color options





Brass / Granite

Black / Granite

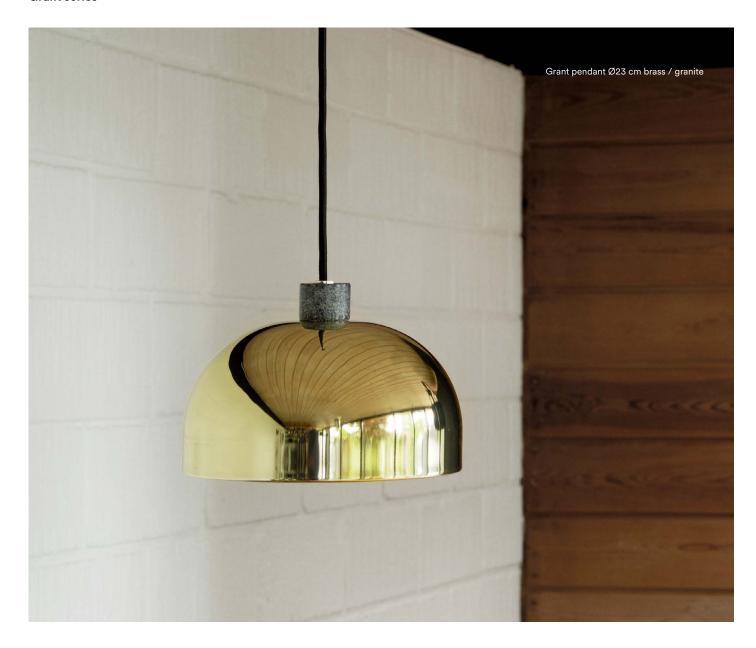

Product Facts Grant pendant US

Description

The Grant pendant lamps in two sizes provide ample opportunity for lighting up spaces of various sizes and characters. Due to the dispersion lens, the pendants can be hung high without blinding.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection are constructed with a replaceable low-energy LED light source with dispersion lens, attached with small brass finger screws.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

4 m textile cord, black color.

Canopy

Included, black color, H: 7,7 x Ø: 9 cm, 0,04 kg ▶

Yes-with dimmable light source. Ensure your dimmer is compatible with LED.

Voltage

120 V

Frequency

60 Hz

Ip rating

IP20

Classification

Class I

Socket

GX53

Max load

7 W

Light source - included

Grant Pendant Ø23 cm:

LED included: GX53 Art. No.: 502028

Power: 5W±10% CCT: 3 000 K Output: 400 lm ±10% Life Span: 15 000-20 000


CRI: ~80

Grant Pendant Ø45 cm:

LED included: GX53 Art. No.: 502029


Power: 7W±10% CCT: 3 000 K Output: 610 lm ±10% Life Span: 15 000-20 000

CRI: ~ 80

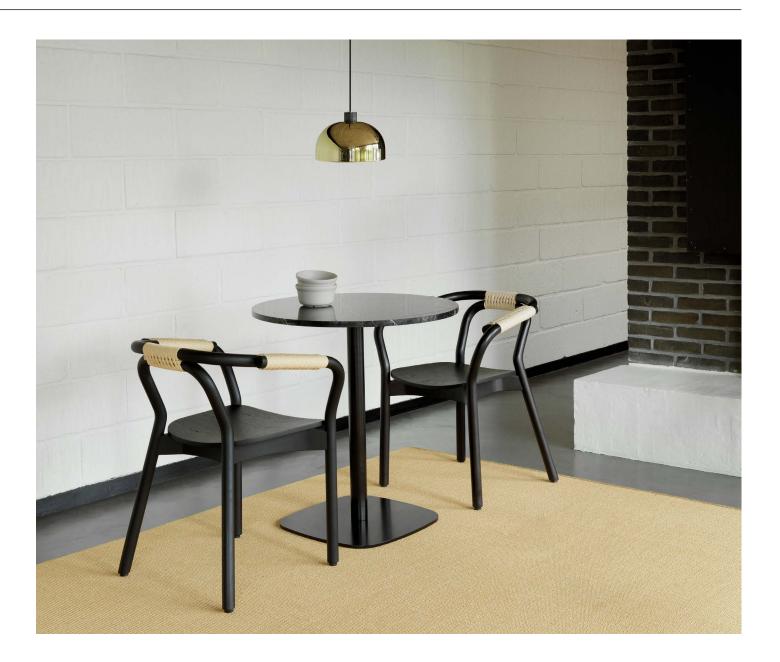



normann

Grant pendant Ø23

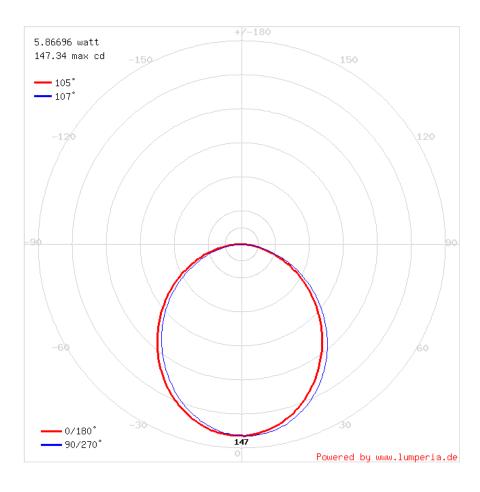

Grant pendant Ø45

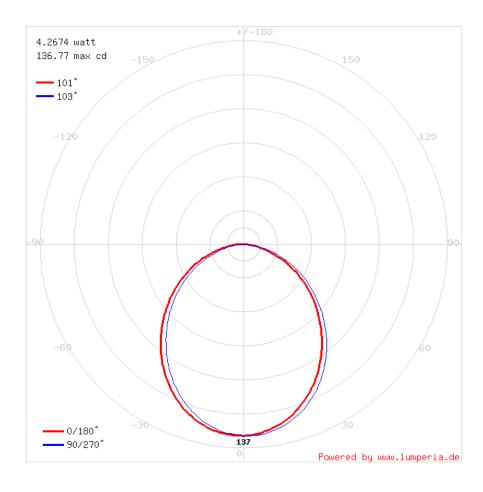

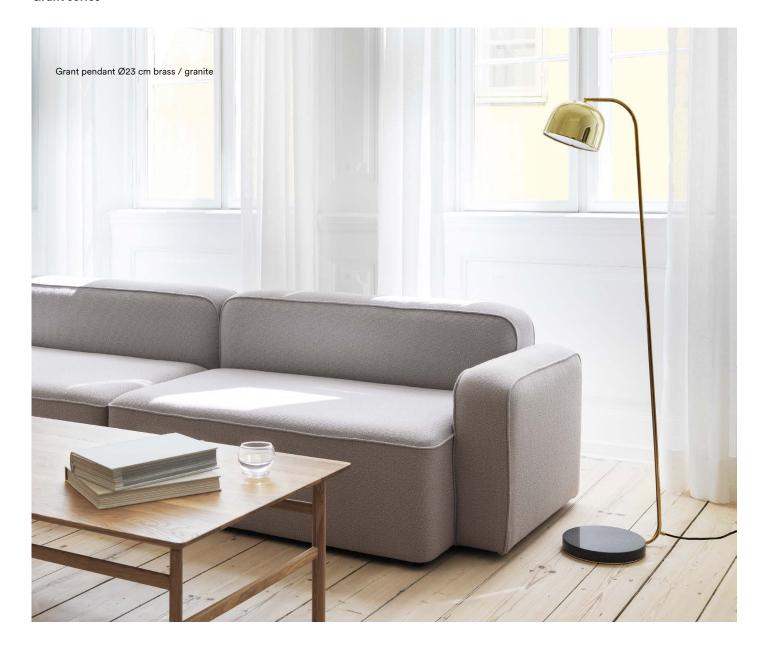

Product Facts Grant floor lamp US

Description

Sharing the same features as the Grant table lamp, an adjustable shade and dimmer switch, the Grant floor lamp is ideal as a reading lamp or for lighting up dark corners.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection are constructed with a replaceable low-energy LED light source with dispersion lens,attached with small brass finger screws. A ball joint connection on the table and floor lamp allows the lampshades to be positioned in diverse directions.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

2 m textile cord with switch, black color. ▶

Yes

Voltage

120 V

Frequency

60 Hz

Ip rating

IP20

Classification

Class I

Socket

GX53

Max load

7 W

Light source - included

LED included: GX53 Art. No.: 502027


Power: 4W±10% CCT: 3 000 K Output: 300 lm ±10%

Life Span: 15 000-20 000

CRI: ~ 80



normann

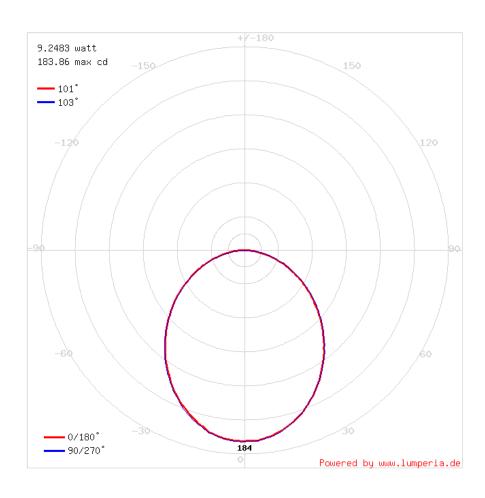



Product Facts Grant table lamp US

Description

The Grant table lamp is a sophisticated desk lamp for the home office, but equally fit for the bedside table or living room sideboard. Tilt the lampshade up and down to direct the light and scroll on the cord's dimmer switch to go from soft ambiance light to a bright reading light.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection, are constructed with a replaceable low-energy LED light source with dispersion lens, attached with small brass finger screws. A ball joint connection on the table and floor lamp allows the lampshades to be positioned in diverse directions.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

2 m textile cord with switch, black color.

Yes

Voltage

120 V

Frequency

60 Hz

Ip rating

IP20

Classification

Class I

Socket

GX53

Max load

7 W


Light source - included

LED included: GX53 Art. No.: 502027


Power: 4W±10% CCT: 3 000 K Output: 300 lm ±10%

Life Span: 15 000-20 000

CRI: ~ 80

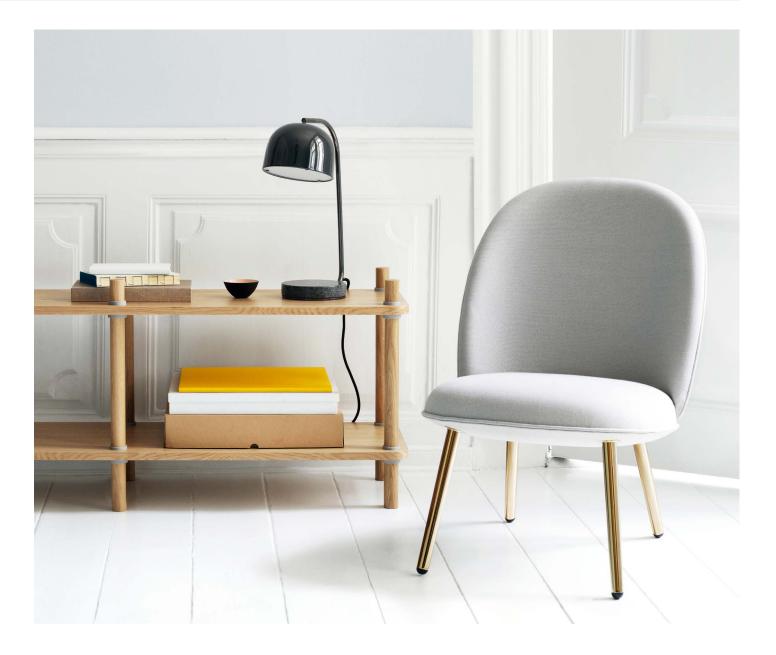

normann

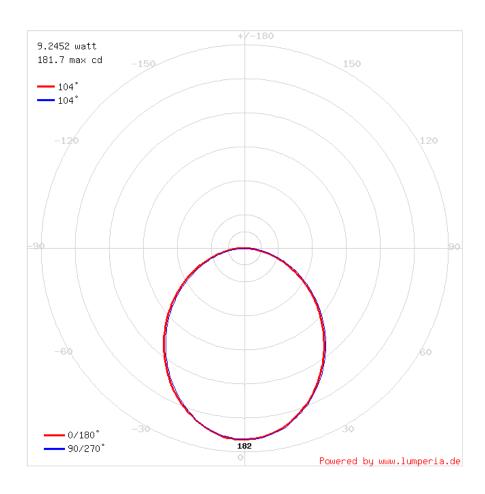



Product Facts Grant wall lamp US

Description

An aesthetic and space-optimizing lighting solution, the Grant wall lamps have arms that move from right to left and lampshades that can be tipped up and down, allowing the lamps to take up several different positions.

Design

Simon Legald, 2018

Material

Brass plated steel / Black plated steel / Granite

Construction

The six versions of the Grant collection are constructed with a replaceable low-energy LED light source with dispersion lens, attached with small brass finger screws. The wall lamp versions can move from side to side (ca.180 degrees). A ball joint connection allows the lampshades to be positioned in diverse directions.

Maintenance

Clean with damp cloth. Avoid use of all-purpose cleaners and other degreasing detergents.

Cord

4 m textile cord with switch, black color.

Yes

Voltage

120 V

Frequency

60 Hz

Ip rating

IP20

Classification

Class I

Socket

GX53

Max load

7 W

Light source - included

LED included: GX53 Art. No.: 502027

Power: 4W±10% CCT: 3 000 K Output: 300 lm ±10%


Life Span: 15 000-20 000

CRI: ~ 80




normann

Grant wall lamp 43 cm

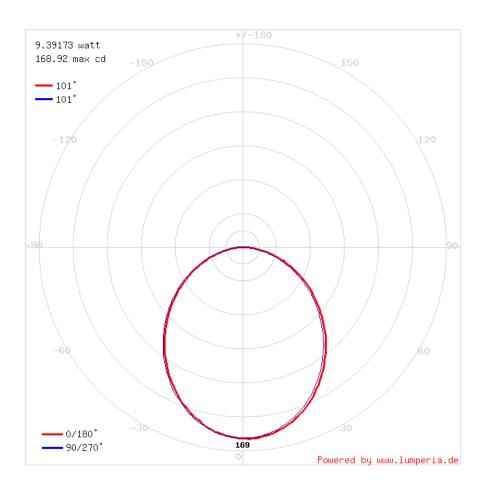

Grant wall lamp 111 cm

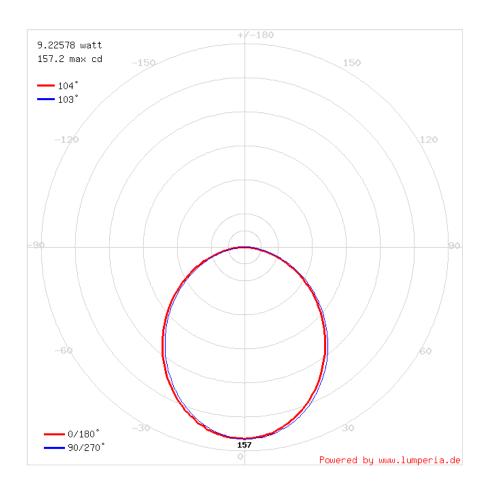

Contact

Normann Copenhagen

Østerbrogade 70, 2100 Copenhagen, Denmark normann@normann-copenhagen.com +45 35 55 44 59

