
Captain's Chairs

© design by Metrica


Sliding High sliding Woody's High woody's Rolling Paw Swivel Storage net Cushion




Sliding chair

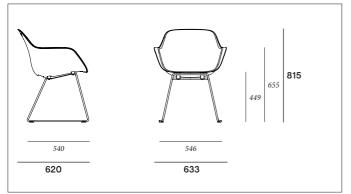


Woody's chair

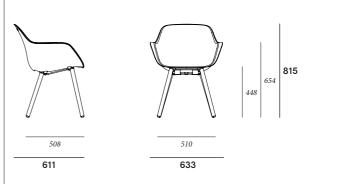

High sliding chair

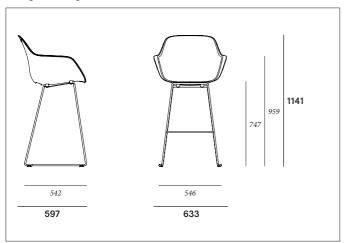


High woody's chair

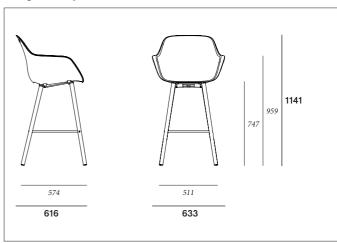


extremis[®]

The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in mm, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.


Rolling chair

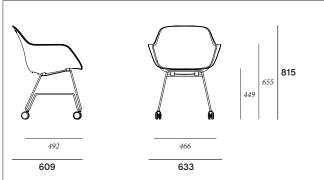

Paw chair

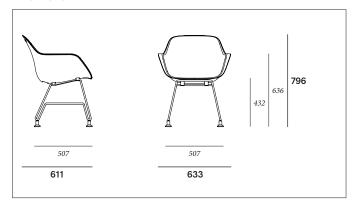

Swivel chair

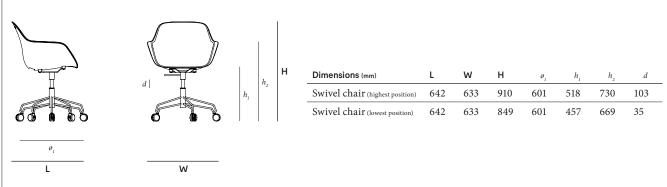

BOX 1: SHELL



BOX 2: FRAME + MOUNTING KIT



BOX 3: SHELL + FRAME + MOUNTING KIT



BOX 4: FRAME + MOUNTING KIT




701

BOX 5: LEGS


Box dimensions (mm)		L	W	н	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Sliding chair	Box 1	735	665	490	1	0,24	7,20	4,00	3,20
	Box 2	590	590	470	1	0,16	6,90	3,50	3,40
					total:	0,40	14,10	7,50	6,60
High Sliding chair	Box 1	735	665	490	1	0,24	7,20	4,00	3,20
	Box 2	590	590	750	1	0,26	8,60	5,20	3,40
					total:	0,50	15,80	9,20	6,60
Woody's chair	Box 1	735	665	490	1	0,24	7,20	4,00	3,20
	Box 4	430	390	70	1	0,01	3,06	2,66	0,40
	Box 5	870	155	80	1	0,01	3,03	2,69	0,34
					total:	0,26	13,29	9,35	3,94
High Woody's chair	Box 1	735	665	490	1	0,24	7,20	4,00	3,20
	Box 4	430	390	70	1	0,01	4,20	3,80	0,40
	Box 5	870	155	80	1	0,01	4,41	4,07	0,34
					total:	0,26	15,81	11,87	3,94
Rolling chair	Box 1	735	665	490	1	0,24	7,20	4,00	3,20
	Box 2	590	590	470	1	0,16	7,46	4,06	3,40
					total:	0,40	14,66	8,06	6,60
Paw chair	Box 1	735	665	490	1	0,24	7,20	4,00	3,20
	Box 2	590	590	470	1	0,16	7,10	3,70	3,40
					total:	0,40	14,30	7,70	6,60
Swivel chair	Box 3	650	610	470	1	0,19	12,55	9,55	3,00

There are **maximum 6 shells per box**: 0,29 m³ | Gross weight (kg): 24,00 | Net weight (kg): 27,20
There are **maximum 6 sliding frames per box**: 0,18 m³ | Gross weight (kg): 21,00 | Net weight (kg): 24,40
There are **maximum 2 high sliding frames per box**: 0,27 m³ | Gross weight (kg): 10,40 | Net weight (kg): 13,80
There are **maximum 6 rolling frames per box**: 0,18 m³ | Gross weight (kg): 24,36 | Net weight (kg): 27,76
There are **maximum 6 paw frames per box**: 0,18 m³ | Gross weight (kg): 22,20 | Net weight (kg): 25,60

Cushion

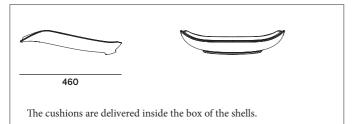

Storage net

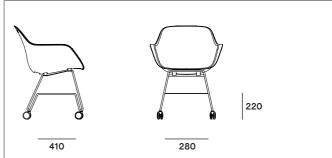

The storage net is delivered inside the box of the shells. Only compatible with Captain's Rolling chair and Captain's Paw chair



Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV color fastness	Flame retarding
		mm	micron					
Polypropylene shell	• Reinforced polypropylene (17% fibre glass)	5 - 8	n.a.	0,90 103kg/m3	Outdoor & indoor	n.a.	Very good UV-resistance	1
Structured powder coated steel legs (sliding, high sliding chair & swivel chair)	Easy to clean Cold galvanized, then powder coated	12	100	7,50 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: color can fade to some extent when exposed to UV	NEN- EN13501- 1 A1 *
Hot dip galvanized steel (sliding & high sliding chair)	 Most durable method for protecting metal from rusting Protective layer Very long life span 100% recyclable Cradle to Cradle Certified™ 	2 - 10	50 - 100	7,50 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good, gal- vanisztion will however become less shiny when used outdoors	NEN- EN13501- 1 A1 *
Stainless steel legs (Rolling & paw chair)	High rust resistance Periodical maintenance required	12	n.a.	8,00 10 ³ kg/m ³	Outdoor & indoor	n.a.	No effect	NEN- EN13501- 1 A1 *
Jatoba legs (Woody & High woody's chair) 100% From well-managed forests FSC C143102	 Exceptional quality Characteristics: durability & stability Bleeds when wood is exposed to rain for the first few times The dye is water-soluble 	35	n.a.	$780~\rm kg/m^3$	Outdoor & indoor	n.a.	Untreated wood turns grey after a while	/
Woolfelt cushion	100% wool feltPolyether foam filling	2	n.a.	460 gr/m³	Store indoors	n.a.	(ISO 105-B02: 2014)	/
PVC coated polyester mesh storage net	 Extremely strong Exceptional tear strength Excellent UV resistance Robust 100% recyclable 	0,7	n.a.	590 g/m ²	Outdoor & indoor	n.a.	≥ 7 (QUVTEST T30-036 lamp UVA 340)	DIN 4102-B2/ M2 **

^{*} NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

^{**} DIN 4102 - B2/M2: Kleinbrenner: Class B2: All materials used in buildings in Germany need to meet the B2 requirement which is determined using a small flame test.

Warnings A

General

- Do not use any sharp tools to open the packaging.
 We strongly advise against using power tools.
- Tripping hazard, mind your step.
- Do not put out cigarettes on the chair.
- Not grafitti proof.
- · Do not leave children unattended whilst playing on the chair.
- To avoid danger of suffocation, keep plastic bags away from babies and children.
- Colors can differ over years and from batch to batch.

Product

- Stains should be removed immediately with a clean, soft cloth, particularly in case of dark-colored liquids such as wine, ink, coffee, coke, oil or bird droppings. If left to dry, these liquids may cause permanent damage.
- The chairs are weatherproof, except for the versions with wheels
- · Do not stand on the chairs.
- Max. 120 kg per chair
- Do not lean backwards, always stay on 4 feet.
- · Store the cushions indoors when not used.
- · Risk of suffocation in plastic bags.

Polypropylene

- Avoid using aggressive & abrasive products.Very good UV-resistance.

Powder coating

- White powder coating requires more maintenance.
- Do not use abrasive scouring powders or scourers as they will scratch the surface.

- Color can fade to some extent when exposed to UV.
- Flame retarding NEN-EN13501-1 A2-sl Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will nog significantly contribute to the fire load and fire growth.
- · Dark colors can get very hot in sunny weather.

Galvanized steel

- · Galvanisation will become less shiny when used
- Flame retarding NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.
- Possible impurities in the immersion tank can cause black marks during galvanization, which are intrinsic to this industrial finishing technique.
- White marks on this zinc layer are also intrinsic to this procedure and will disappear when the furniture is put
- This industrial finishing technique may result in a rougher surface. This is intrinsic to the process.

Stainless steel

- Very good UV colo r fastness
- Flame retarding: NEN-EN13501-1 A1 Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.
- Watch out, stainless steel isn't entirely rustproof! Be sure

to avoid contact with iron objects. If it does show signs of rust, clean with rust remover as quickly as possible

Wood

- · When delivered, the wood is untreated.
- The wood can bleed when it's exposed to rain for the first few times.
- · Wood is a natural material and its look is different for every slat, plank and tree.
- · Wood will gradually become rougher and start to turn grey as a consequence of exposure to the sun and rain. We recommend oiling the wood once or twice a year. 1x before the Summer and 1x after the Summer as protection for the Winter.
- Cleaning regularly with mild detergent. Never use a high pressure cleaner as this will roughen the wood's smooth surface and irreparably damage the wood's fibres.
- Thorough cleaning with Extremis Wood Cleaner.
- · We strongly recommend that you treat your wood with wood oil to protect it from stains - Small cracks and crevices can also appear as part of this process. We strongly advise everyone to treat the furniture with our Wood Protector. It is best to repeat this treatment each

- · Stains should be removed immediately with a clean, soft cloth, particularly in case of dark-colored liquids such as wine, ink, coffee coke, oild and bird droppings. If left to dry, these liquids may cause permanent damage!

Applications

Residential: on terraces, patios, at a dining table, at a desk, shared gardens. Indoor as well as outdoor. Project: hotels and catering industries, company terraces, public spaces, squares, event venues, schools, offices, meeting rooms, bars, ...

Captain's chair combines perfectly with Marina, Hopper combo, Hopper table & Pontsūn.



F.a.q.

Q: Is the chair weatherproof?

A: Yes, except for the versions with wheels. The shell and frame of the Captain's Chair are made of durable, UV- & water proof materials. The shape of the shell makes sure water can evacuate easily.

Website

www.extremis.com/captainschair

Good to know

Because the shells and frames are separately stackable, they do not take up a lot of transport volume.

There are maximum 6 shells per box: 0,27 m³ There are maximum 6 frames per box: 0,21 m³

- We do not recommend the use of the Rolling & Swivel chair outside, the chairs can be blown away because of its wheels.
- No need for extra straps to fix the cushions.
- There is a water drain and ventilation hole in the shell.

Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

- Use common kitchen cleaning products. Avoid using aggressive products. These surfaces are best cleaned with a neutral cleaning product diluted in
- In case of stubborn stains, we recommend using a magic sponge.

POWDER COATED PARTS

- · White powder coating obviously requires more maintenance.
- · Clean stains with a magic eraser.

GALVANIZED PARTS

How to repair a damaged zinc layer?

- Clean regularly with mild detergent.
- Thorough cleaning with Extremis Wood Cleaner.
- Oil the wood with Extremis Wood Protector. We recommend oiling the wood at regular intervals depending from location and general weather
- · In order to smoothen the surface again after a thorough cleaning, lightly sand your wood with 80 grit sanding paper or a sanding pad.

STAINLESS STEEL

• Clean regularly with with a dry cloth and some stainless steel cleaner.