
Bistroo

© design by Dirk Wynants

Table tray Cushions Floor fastening



Bistroo with purse hanger & stacking spacer

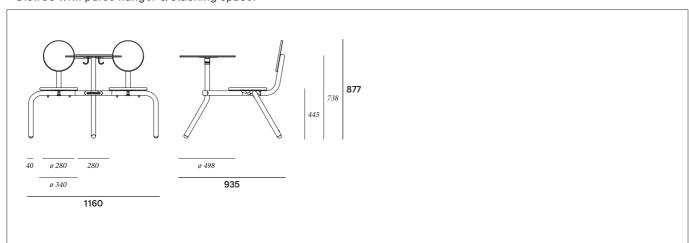

BOX 1: BISTROO




Box dimensions (mm)		L	W	н	Qty (#)	Volume (m³)	Gross weight (kg)	Net weight (kg)	Packaging weight (kg)
Bistroo	Box 1	750	610	280	1	0,13	28,00	23,60	4,40

extremis[®]


The content of this document, in particular the mentioned models, is protected by copyrights and/or design rights. The present document and its content is communicated to you for information purposes only. Any partial or total reproduction or any other use without our prior written permission is strictly prohibited. This technical sheet remains subject to possible changes. All dimensions are in mm, unless mentioned otherwise. Extremis is not responsible for the errors in the documentation of products. All measurements are approximate and are provided for informational purposes only.

Tech sheet 20201019


Table tray

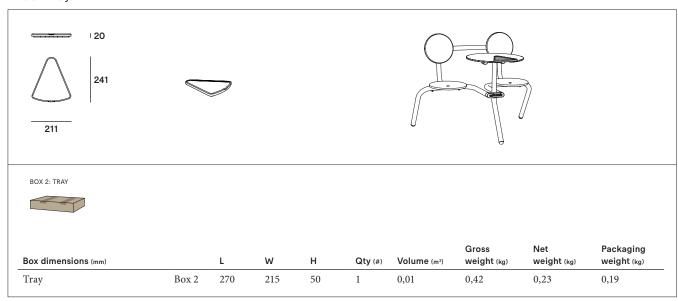

Cushion

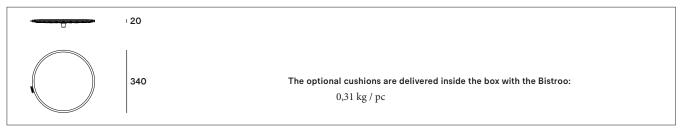

Floor fastening

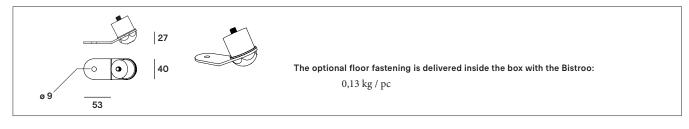



Tabletop, seats, backrest & legs



Structured powder-coating*

Cushion



*Subject to change, check price list or www.extremis.com

Materials	Key facts	Thickness	Layer thickness	Density	In/outdoor	Water	UV color fastness	Flame retarding
		mm	micron					
Structured powder- coated aluminium tabletop, seats & backrests	 A technique of applying dry paint to a part Electrostatically charged and sprayed onto the object Placed in an oven and powder particles melt and coalesce to form a continuous film More scratch-resistant than non structured powder-coating 	10	50 - 100	2,70 10 ³ kg/m ³	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN-EN 13501-1 A2-s1*
Structured powder- coated stainless steel legs	Easy to clean Stainless steel (for protection against rust), then powder-coated Placed in an oven and powder particles melt and coalesce to form a continuous film More scratch-resistant than non structured powder-coating	2	50-100	$8,00 10^3 kg/$ m^3	Outdoor & indoor	n.a.	Very good: colour can fade to some extent when exposed to UV	NEN- EN13501- I A1 *
Bamboe table tray	Oiled for better dirt resistance	20	n.a.	600 à 700 kg/m³	Outdoor & indoor	n.a.	Wood turns grey after a while	/
Woolfelt cushion	100% wool feltPolyether foam filling	2	n.a.	460 gr/m³	Store indoors	n.a.	(ISO 105-B02: 2014)	/
Stainless steel AISI 316 floor fastening	High rust resistance Periodical maintenance required	1,50	n.a.	8,00 10 ³ kg/ m ³	Outdoor & indoor version	n.a.	Very good	NEN- EN13501- 1 A1 *

* NEN-EN13501-1 A1

Class A1 products will not contribute to fire in any stage, including fully developed fire. For this reason, they are assumed to be capable of satisfying all requirements of all lower classes as well.

** NEN-EN13501-1 A2-sl

Satisfying the same criteria as class B for the SBI-test according to EN 13823. In addition, under conditions of a fully developed fire these products will significantly contribute to the fire load a fire growth.

Warnings 🛆

General

- Do not use any sharp tools to open the packaging.
 We strongly advise against using power tools.
- Tripping hazard, mind your step.
- · Do not put out cigarettes on the table.
- Not grafitti proof.
- · Do not leave children unattended whilst playing on the table.
- To avoid danger of suffocation, keep plastic bags away from babies and children.
- Colors can differ over years and from batch to batch.

- · Anchoring the product has to be done by qualified people.
- · For anchoring: use suitable bolts or screws from a specialized store depending on the material your terrace is made of.
- Stackable up to 4 pieces.
- Always stack the tables with 2 people.
- · Only use Extremis accessories.
- Do not sit on the tabletop.
 Do not stand or jump on the seat or the tabletop.
 Max. 1 person or 120 kg per seat.

Powder-coating

- · White powder-coating requires more maintenance.
- Do not use abrasive scouring powders or scourers as they will scratch the surface.
- Colour can fade to some extent when exposed to UV.
- Flame retarding NEN-EN13501-1 A2-sl Satisfying the same criteria as Class B for the SBI-test according to EN13823. In addition, under conditions of a fully developed fire these products will nog significantly contribute to the fire load and fire growth
- Dark colors can get very hot in sunny weather.

Felt

- Stains should be removed immediately with a clean, soft cloth, particularly in case of dark-coloured liquids such as wine, ink, coffee coke, oild and bird droppings. If left to dry, these liquids may cause permanent damage!
- Do not bleach to clean.

Applications

Residential: Bistroo is the solution we came up with while designing compact furniture for urban patios, rooftop terraces and balconies. The design responds to the trend for smaller living. Perfect for city dwellers!

Project: For hospitality or corporate lunch areas, indoor and outdoors.

Floor fastening

Our Bistroo picnic table can be fixed to the floor, to prevent them from being moved, or worse, from being stolen. However, attaching it to the floor is not always enough, as bolts can always be unscrewed. We offer a connection piece that replaces the end cap at the bottom of a table leg.



Good to know

- Fits on a terrace or balcony of 1.2 x 1.2 meter.
- Water draining seat.
- Bistroo combines perfectly with Virus.
- · Tabletop cut-out to fix accessories.



· Stackable up to 4 pieces.



Maintenance

Find maintenance instructions at the downloads section of extremis.com for:

POWDER-COATED PARTS

- White powder-coating obviously requires more maintenance.
- Clean stains with a magic eraser.

FELT CUSHIONS

- Hand-wash in lukewarm water, please don't squeeze but spread them out for drying.
- Use a mild detergent and don't bleach, pleae also don't remove stains with aggressive chemicals but mild detergents.

F.a.q.

Q: Is it possible to stack the table?

A: It is possible. You can stack Bistroo up to 4 pieces. To avoid dammage, use blankets.

Q: Is it easy to move the table?

A: The table is very light, so it can be moved easily.

Awards







Website

www.extremis.com/bistroo