


# BUTTON

Federico Peri

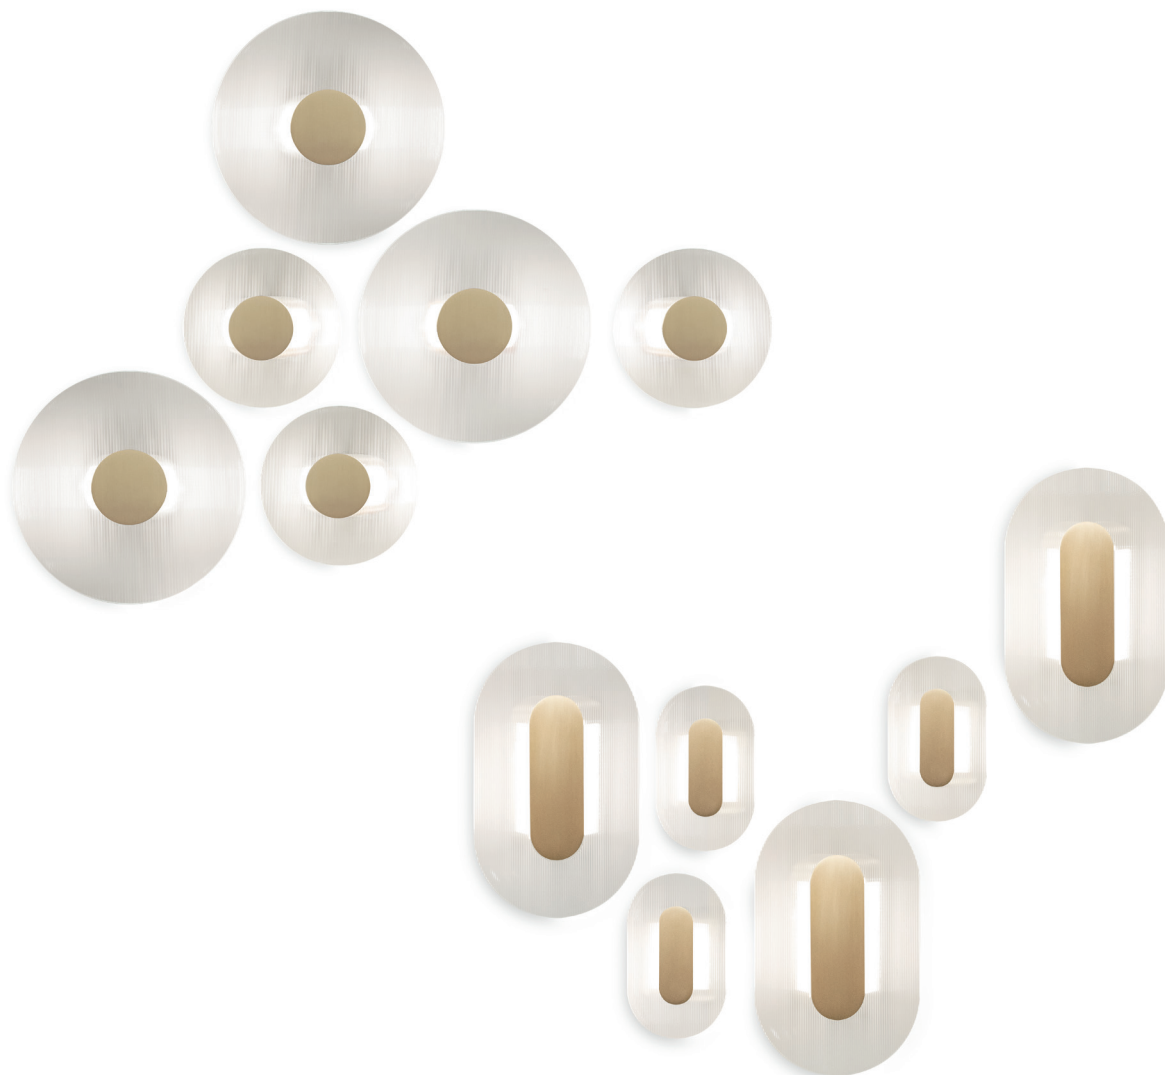

Struttura in ottone satinato con vernice trasparente opaca. Tubo interno cablato in alluminio con opalino in metacrilato. Piastra per aggancio a parete in metallo verniciato e guaine in nylon. Vetro rigato spessore 4 mm.

Satin-finished brass structure with clear matte enamel finish. Aluminium wired inner tube with methacrylate opaline. Plate for wall mounting in varnished metal and nylon sheaths. 4 mm thickness striped glass.

Ø35 x 10 | 0,05 m<sup>3</sup>

Applique. Wall lamp.



Striscia LED 0,5 MT - 12,5 W/24 V – alimentatore 10W/510 lumen.  
35: 0,5 MT LED strip – 12,5 W/24 V – 10W/510 lumens ballast.

Ø50 x 10 | 0,07 m<sup>3</sup>

Applique. Wall lamp.



Striscia LED 0,5 MT - 12,5 W/24 V - alimentatore 10W/510 lumen  
0,5 MT LED strip - 12,5 W/24 V - 10W/510 lumens ballast.

18 x 10 h30 | 0,02 m<sup>3</sup>

Applique. Wall lamp.



Striscia LED 0,9 MT - 12,5 W/24 V - alimentatore 10W/449 lumen.  
0,9 MT LED strip - 12,5 W/24 V - 10W/449 lumen power supply.

30 x 10 h50 | 0,05 m<sup>3</sup>

Applique. Wall lamp.



Striscia LED 0,44 MT - 12,5 W/24 V - alimentatore 10W/951 lumen.  
0,44 MT LED strip - 12,5 W/24 V - 10W/951 lumen power supply.

